

2-JAW ANGULAR ROTARY GRIPPERS

SERIES DGK

▶ PRODUCT ADVANTAGES



“TWO in ONE”

▶ Smooth stroke configuration

You can adjust the 180° opening angle to be unique to your application using an adjusting screw

▶ 2 in 1

Gripping and swivelling in a module allows optimum utilisation of the installation space






▶ Individually adjustable

How you stay flexible: 90° or 180° swivel angle - You decide what your application requires on site

▶ SERIES CHARACTERISTICS


Installation size

DGK20N

 1.5 million maintenance-free cycles (max.)	●
 Magnetic field sensor	●
 Rotation angle 90°	●
 Rotation angle 180°	●
 IP 20	●



► BENEFITS IN DETAIL

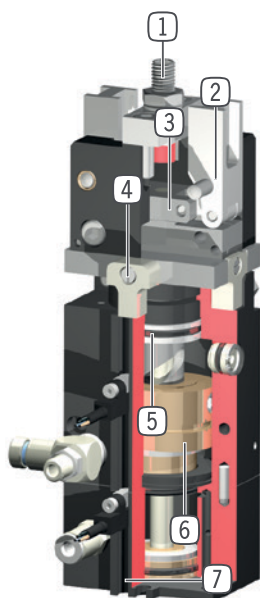

- ① **Stroke adjustment screw**
 - Infinitely adjustable opening stroke
- ② **Gripper jaw**
 - individual gripper finger mounting
- ③ **Guided toggle lever mechanism**
 - synchronized the movement of the gripper jaws
 - mechanically self-locking
- ④ **Endposition 0°/90°/180° adjustment**
 - endstops for 0°/90°/180° included with purchase
- ⑤ **Rotating-drive mechanism**
 - robust, wear-resistant
- ⑥ **Drive**
 - two double-acting pneumatic cylinders
- ⑦ **Slot for magnetic field sensor**
 - sensing of the rotational position and gripper jaw position

► TECHNICAL DATA

	Stroke	Gripping force	Weight	IP class
Installation size	[°]	[N]	[kg]	
DGK20	90	150	0.49	IP20

► FURTHER INFORMATION IS AVAILABLE ONLINE



All information just a click away at: www.zimmer-group.com. Find data, illustrations, 3D models and operating instructions for your installation size using the order number for your desired product. Quick, clear and always up-to-date.


2-JAW ANGULAR ROTARY GRIPPERS

INSTALLATION SIZE DGK20

▶ PRODUCT SPECIFICATIONS



▶ Gripping force diagram

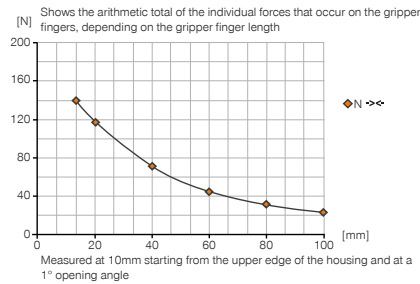


▶ Forces and moments

Displays static forces and moments that can also have an effect, besides the gripping force.




Mr [Nm]	0.8
Mx [Nm]	0.8
My [Nm]	1
Fa [N]	150

▶ Rotation time diagram

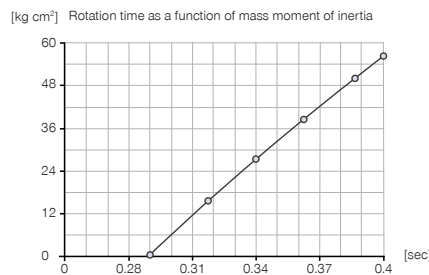

▶ Gripping moment diagram

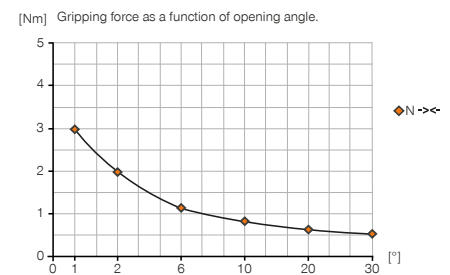

▶ INCLUDED IN DELIVERY



2 [piece]
Flow Control Valves - with Swivel joint
DRVM5X4



1 [piece]
Stop 90° + 180°
ANS0065

▶ RECOMMENDED ACCESSORIES



ENERGY SUPPLY



GVM5
Straight Fittings - Quick Connect Style



SENSORS



MFS01-S-KHC-P1-PNP
Magnetic field sensor angled, cable 0.3 m - M8 connector



SENSORS



MFS01-K-KHC-P1-PNP
Magnetic field sensor angled, cable 5 m



MFS02-K-KHC-P1-PNP
Magnetic field sensor straight, cable 5 m



MFS02-S-KHC-P1-PNP
Magnetic field sensor straight, cable 0.3 m - M8 connector

Order no.	Technical data
	DGK20N
Stroke per jaw [°]	90
Gripping force in closing [N]	150
Gripping moment in closing [Nm]	3
Closing time [s]	0.25
Opening time [s]	0.25
Torque [Nm]	0.5
Repetition accuracy +/- [mm]	0.1
Repetition accuracy +/- [°]	0.05
Axial bearing load [N]	960
Radial bearing load [Nm]	10
Operating pressure [bar]	3 ... 8
Nominal operating pressure [bar]	6
Operating temperature [°C]	5 ... +80
Air volume per cycle [cm ³]	9
Air volume per cycle 90° [cm ³]	4.6
Air volume per cycle 180° [cm ³]	9.2
Protection to IEC 60529	IP20
Weight [kg]	0.49

