

INDUSTRIAL SHOCK ABSORBERS POWERSTOP

THREAD M08X1.0

► SERIES

PowerStop®





STANDARD ENERGY	HIGH ENERGY	ADJUSTABLE ENERGY
		
The economical	The powerful	The Adjustable

► Material	Stainless steel	► Organic oil (biodegradable)	HEES
► Permitted temperature range	-10 ... +70 [°C]	- H1-certified	Yes
► Angle of Impact max.	2 [°]	- PWIS-free	Yes
► Max. force at fixed stop	1 [kN]	► RoHS compliant - REACH compliant	Yes
► Lock nut tightening torque		► Max. absolute pressure	
- Standard energy	3 [Nm]	- Standard energy	1 [bar]
- High Energy	3 [Nm]	- High Energy	10 [bar]
- Adjustable Energy	3 [Nm]	- Adjustable Energy	10 [bar]



















► TECHNICAL DATA

	Design	Series	Thread	Stroke variant	Stroke	Hardness degree	Impact velocity		Energy absorption max.			Protection	Reset			Head	Integrated Fix stop	Version	
					max. [mm]		min. [m/s]	max. [m/s]	Continuous operation		Emergency stop operation		Force		Time				
									per stroke	per hour	per stroke		min.	max.	max.				
																			[J]
STANDARD ENERGY	P	SE	08X10	N	6	H	0,1	1,2	1,5	10.000	1,5	D	1,5	3,0	0,2	D	x	-A	
						M	0,8	2,2	1,5	10.000	1,5	F	1,5	3,0	0,2	E	-		
						S	1,8	3,5	1,5	10.000	1,5	A	1,5	3,0	0,2	S	x		
						W	3,0	5,0	1,5	10.000	1,5	B	1,5	4,5	0,2	K	x		
HIGH ENERGY	P	HE	08X10	N	6	H	0,1	1,2	4	10.000	5	D	2,5	4,5	0,2	D	x	-A	
						M	0,8	2,2	4	10.000	5	F	2,5	4,5	0,2	E	-		
						S	1,8	3,5	3,5	10.000	4	A	2,5	4,5	0,2	S	x		
						W	3,0	5,0	3,5	10.000	4	B	2,5	6,0	0,2	K	x		
ADJUSTABLE ENERGY	P	AE	08X10	N	6	H	0,1	5,0	4	10.000	4	D	2,5	4,5	0,2	D	x	-A	
						F	2,5	4,5	0,2	E	-								
						A	2,5	4,5	0,2	S	x								
						B	2,5	6,0	0,2	K	x								

► PROTECTION

D -A	F -A	A -A	B -A
			
in a clean environment	against dust, chips, ...	against liquid, oil, ...	

► TECHNICAL DRAWINGS

	Short piston rod no head	Long piston rod no head	with steel head	with plastic head	with bellows and steel head	with bellows and plastic head
	N D -A	N E -A	N S -A	N K -A	N B S -A	N B K -A
STANDARD ENERGY						
HIGH ENERGY						
ADJUSTABLE ENERGY						

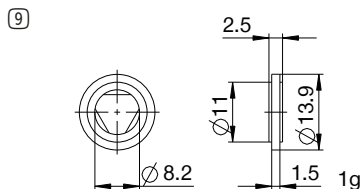
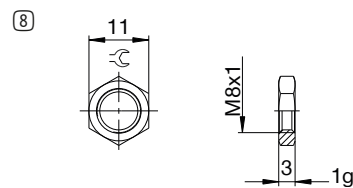
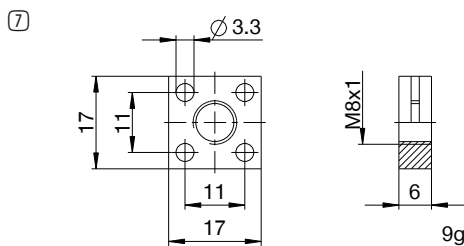
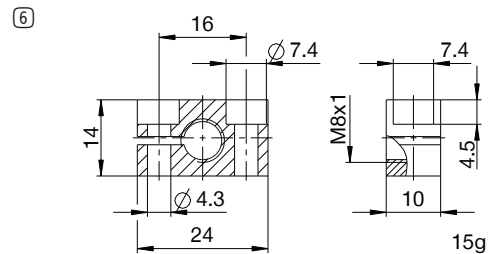
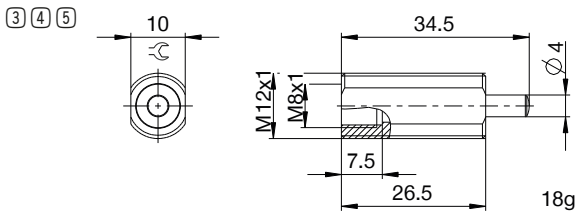
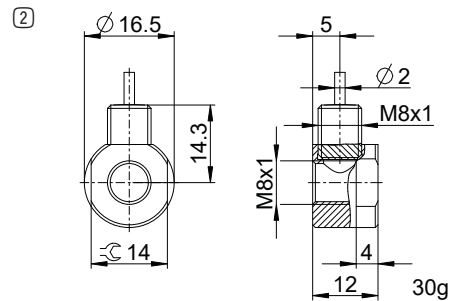
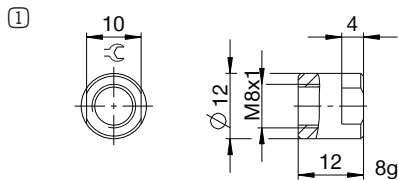


INDUSTRIAL SHOCK ABSORBERS POWERSTOP

THREAD M08X1.0

► ACCESSORIES

Pos.	Order no.	Accessories	Remarks
①	PAH08X10-A	Stop sleeve	Including 1x PVM08X10-A. Industrial shock absorber with bellow excluded.
②	PSH08X10-B	Sensor stop sleeve	Including 1x PVM08X10-A. Sensing only possible via industrial shock absorbers with steel or plastic head. Industrial shock absorber with bellow excluded. Inductive sensor, PNP (NC), 2 m PUR cable, IP67 degree of protection. See separate data sheet for additional information.
③	PBV08X10ND-A	Side load adapter standard stroke Protection: no protection	Impact angle max. 30°. Can only be used in combination with industrial shock absorber without protection and without the Short piston rod no head variant. Lock nut PVM12X10-A suitable for external thread of the side load adapter.
④	PBV08X10NF-A	Side load adapter standard stroke Protection: felt ring (felt)	Impact angle max. 30°. Can only be used in combination with industrial shock absorber without protection and without the Short piston rod no head variant. Lock nut PVM12X10-A suitable for external thread of the side load adapter.
⑤	PBV08X10NA-A	Side load adapter standard stroke Protection: wiper (NBR)	Impact angle max. 30°. Can only be used in combination with industrial shock absorber without protection and without the Short piston rod no head variant. Lock nut PVM12X10-A suitable for external thread of the side load adapter.
⑥	PKS08X10-A	Clamping flange orthogonal screwed	Tightening torque of the screws max. 3 Nm.
⑦	PKP08X10-A	Clamping flange screwed in parallel	Tightening torque of the screws max. 1 Nm.
⑧	PVM08X10-A	Stainless steel locknut	Included with the industrial shock absorber.
⑨	PDD08X10-A	Pressure chamber seal	Recommended fixation with PVM08X10-A. Seal must be in full contact on both sides.



► CLASSIFICATION

P SE 08X10 N W A K -A

Design

P Industrial shock absorbers PowerStop

Series

ME Mini Energy

SE Standard Energy

HE High Energy

AE Adjustable Energy

Thread

08 Thread nominal diameter

X

10 Thread pitch (factor 10)

Stroke variant

N Standard stroke

L Long stroke

Hardness degree

H Hard (0.1 - 1.2 m/s; Adjustable Energy: 0.1 - 5 m/s)

M Medium (0.8 - 2.2 m/s)

S Soft (1.8 - 3.5 m/s)

W Supersoft (3 - 5 m/s)

Protection

D no protection

F Felt ring

A Wiper (NBR)

B Bellow (TPE)

Head

D Short piston rod no head

E Long piston rod no head

S with steel head

K with plastic head

Version

-A Versioning from a to z