

2-JAW PARALLEL GRIPPERS


LWR50L-03-00002-A

▶ PRODUCT SPECIFICATIONS




MATCH

▶ Gripping force diagram

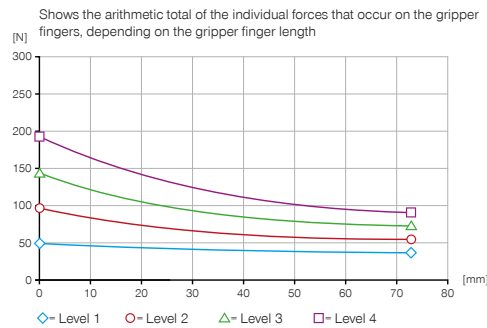

▶ Forces and moments

Shows static forces and moments



Mr_L [Nm]	20	Mr [Nm]	7
My_L [Nm]	40	Mx [Nm]	7
Fa_L [N]	500	My [Nm]	5.5
		Fa [N]	200

Order no.	Technical data
LWR50L-03-00002-A	
General data	
MRK design according to ISO/TS 15066	Yes
Control	I/O
Operating temperature [°C]	5 ... +50
Protection to IEC 60529	IP40
Weight [kg]	0.76
Tool changer specific data	
Electrical energy transfer	integrated
Locking stroke [mm]	1
Repetition accuracy in X, Y [mm]	0.05
Repetition accuracy in Z [mm]	0.05
Tightening force [N]	50
Release force [N]	0
Offset at coupling max. in X,Y [mm]	1.0
Gripper specific data	
Suitable for series	LWR50F-xx-01/02
HRC form	collaborative
Cable management	internal
Type of drive	electrical
Integrated position sensing	Analog 0 to 10 V
Stroke per jaw [mm]	10
Gripping force safety device	mechanical
Gripping force in closing (adjustable) max. [N]	190
Gripping force in opening (adjustable) max. [N]	190
Gripping force in accordance with ISO/TS 15066 [N]	<140
Closing time [s]	0.19
Opening time [s]	0.19
Control time [s]	0.03
Dead weight of mounted gripper finger max. [kg]	0.1
Length of the gripper fingers max. [mm]	80
Repetition accuracy +/- [mm]	0.05
Voltage [V]	24
Current consumption max. [A]	1
Minimum positioning path per jaw [mm]	0.5

▶ RECOMMENDED ACCESSORIES



CONNECTIONS / OTHER



ALWR1-50-A
Match - Storage station

▶ RECOMMENDED ACCESSORY STORAGE STATION



NJ5-E2SK-01
Inductive Proximity Switch Cable 0,3 m - Connector M8

